


**KPT-35<sup>®</sup>** 

# Solar Filling Pump

The Kammak KPT-35 solar filling pump is designed for safe and easy filling and cleaning solar systems.

- High performance and flow rate
- Light weight and compact with ergonomic design

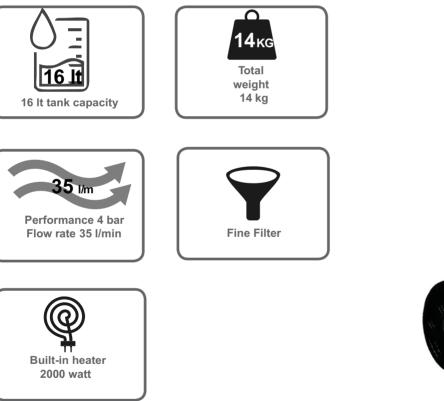



### KAMMAK

High performance descaling pumps and power flushing compressors

Page 1 of 2

Complete with easy-to-use hoses and fittings

## **Additional Features**

- High performance with 4 bar max pressure
- Built-in heater up to 60°C
- Complete with hoses and fittings
- Fine filter
- High flow rate for maximum cleaning
- Rapid removal of system debris
- Thermometer
- Manometer

## **Technical Specification**

Material of Construction	Polyethylene tank and metal stand
Tank Capacity	16 litres
Dimensions	Height: 85cm/Width:35cm/Depth:40cm
Weight	14 kg
Power Requirements	220-230V, 50Hz Europlug
Motor	370W - 0.5 HP
Pressure	1-4 bar max pressure
Flow Rate	35 l/min
Hose	2x2,5m 16mm flow and return hoses
Physical Limitations	Maximum temperature range: 60 °C
Degree of protection	lpx4
Connections/fittings	3/4"



#### KAMMAK Ltd Şti

Cataltepe Mh BESOB 6. Sok No:9/1 16450 Bursa, TURKEY Tel: +90 546 223 28 98 www.kammakpumps.com